

2MP Super Starlight Bullet - Fixed Lens Bullet NP-C-B2P50-40



- Bullet Camera Style
 - 1920x1080@30fps Resolution
 - 4.0mm Fixed Lens
 - Up to 50m (164ft) IR Range
 - IP67 Outdoor Rating
 - Motion Detection
 - Ultra 265, H.265, H.264, MJPEG
 - White Colour
-



Front View



Right View


Technical Specifications

Camera	NP-C-B2P50-40					
Sensor	1/2.8", 2.0 megapixel, progressive scan, CMOS					
Lens	4.0mm@F1.2					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognise (m)	Identify (m)	
	4.0	62.1	24.8	12.4	6.2	
	6.0	93.1	37.2	18.6	9.3	
Angle of view (H)	78.7°					
Angle of View (V)	42.8°					
Angle of View (O)	96.8°					
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 90°		Rotate: 0° ~ 360°	
Shutter	Auto/Manual, 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.0005Lux (F1.2, AGC ON)					
	0Lux with IR					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 50m (164ft) IR range					
Defog	Digital Defog					
WDR	120dB					
Video						
Video Compression	Ultra 265, H.265, H.264, MJPEG					
H.264 code profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream: 2MP (1920*1080), Max 30fps;					
	Sub Stream: 2MP (1920*1080), Max 30fps;					
	Third Stream: D1 (720*576), Max 30fps					
9:16 Corridor Format	Supported					
HLC	Supported					
BLC	Supported					

Technical Specifications

Video	
OSD	Up to 8 OSDs
Privacy Mask	Up to 8 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas
Audio	
Audio Compression	G.711
Two-Way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage ☐	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Interface	
Audio I/O	Input: impedance 35kΩ; amplitude 2V [p-p]
	Output: impedance 600Ω; amplitude 2V [p-p]
Alarm I/O	1/1
Network	1 RJ45 10M/100M Base-TX Ethernet
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 9W
Dimensions (Ø x H)	253.4 × 86 × 71.7mm (9.98" × 3.4" × 2.8")
Weight	1.0kg (2.2lb)
Working Environment	-35°C ~ 60°C (-31°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67

Dimensions

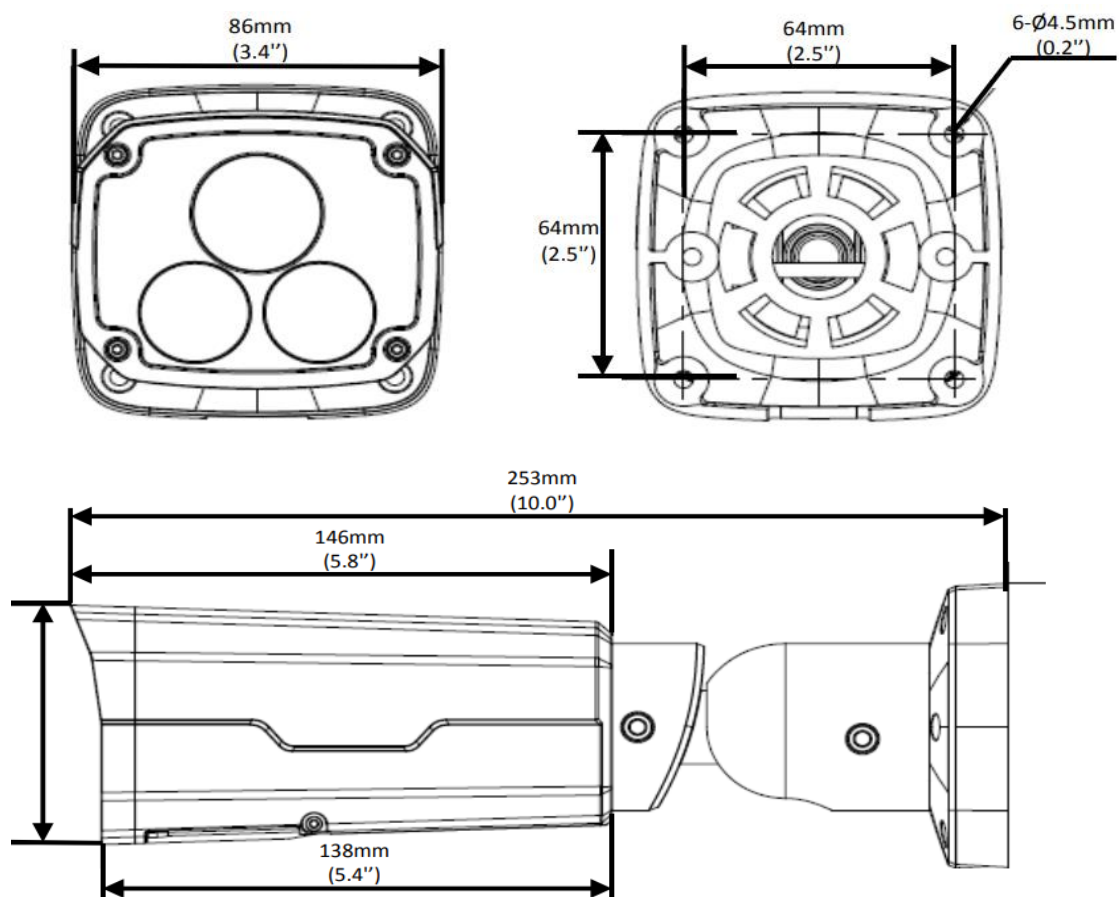

[illegible]