

5MP Starlight Anti-Vandal Dome - Fixed Lens IP Camera

NP-C-D5P30-SL-28(B)(40)



- Anti-Vandal Dome Camera Style
 - 2592x1944@20fps Resolution
 - 2.8mm/4mm Fixed Lens
 - Up to 30m (98ft) IR Range
 - IP67 Outdoor Rating
 - IK10 Impact Rating
 - Motion Detection
 - Ultra 265, H.264, MJPEG
-



Left View



Right View


Technical Specifications

Camera	NP-C-D5P30-SL-28		NP-C-D5P30-SL-40
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS		
Lens	2.8mm@F1.6		4.0mm@F1.6
Angle of view (H)	105.3°		79.7°
Angle of View (V)	69.5°		51.8°
Angle of View (O)	136.8°		98.1°
Adjustment angle	Pan: 0° ~ 360°	Tilt: 0° ~ 75°	Rotate: 0° ~ 360°
Shutter	Auto/Manual, 1 ~ 1/100000s		
Minimum Illumination	Colour: 0.005Lux (F1.6, AGC ON)		
	0Lux with IR		
Day/Night	IR-cut filter with auto switch (ICR)		
Digital noise reduction	2D/3D DNR		
S/N	>55dB		
IR Range	Up to 30m (98ft) IR Range		
Defog	Digital Defog		
WDR	120dB		
Video			
Video Compression	Ultra 265, H.265, H.264, MJPEG		
H.264 code profile	Baseline profile, Main Profile, High Profile		
Frame Rate	Main Stream: 5MP (2592*1944), Max 20fps; 5MP (2592*1944), Max 25fps (WDR OFF); 4MP (2560*1440), Max 30fps; 3MP (2048*1536), Max 30fps; 2MP (1920*1080), Max 30fps;		
	Sub Stream: 2MP (1920*1080), Max 30fps;		
	Third Stream: D1 (720*576), Max 30fps		
9:16 Corridor Format	Supported		
HLC	Supported		
BLC	Supported		
OSD	Up to 8 OSDs		
Privacy Mask	Up to 8 areas		
ROI	Up to 8 areas		
Motion Detection	Up to 4 areas		

Technical Specifications

Audio	
Audio Compression	G.711
Two-way Audio	Supported
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S ,Profile G, Profile T), API
Interface	
Audio I/O	2 Input: impedance 35kΩ; amplitude 2V [p-p]
	1 Output: impedance 600Ω; amplitude 2V [p-p]
Alarm I/O	1/1
Network	1 RJ45 10M/100M Base-TX Ethernet
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 5W
Dimensions (Ø x H)	108.5mm x 81mm (4.28" x 3.2")
Weight	0.45kg (0.99lb)
Working Environment	-35°C ~ 60°C (-31°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67
Impact Rating	IK10

Dimensions

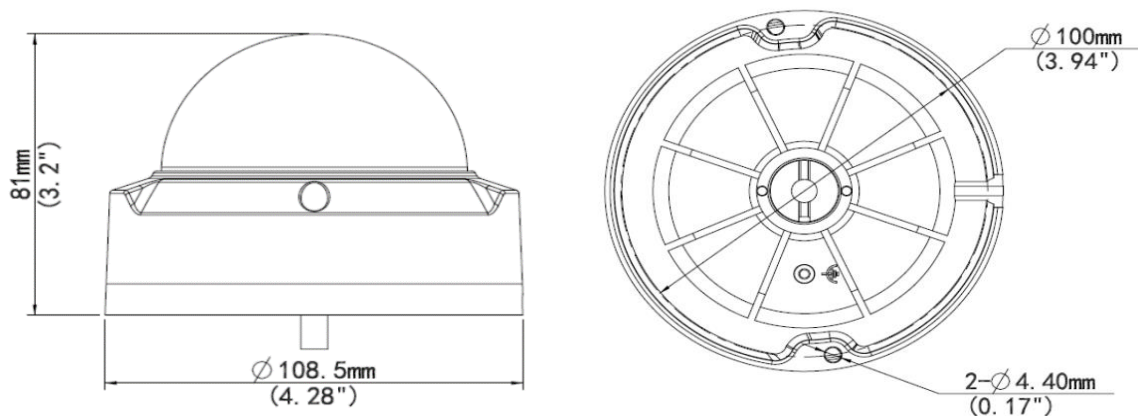

[illegible]