

5MP Starlight Turret - Varifocal Lens IP Camera NP-C-T5P30-M-Z



- Turret Camera Style
 - 2592x1944@20fps Resolution
 - 2.7-13.5mm Autofocus Lens
 - Up to 30m (98ft) IR Range
 - IP67 Outdoor Rating
 - Motion Detection
 - H.265, H.264, MJPEG Encryption
 - White Colour
-



Left View



Right View


Technical Specifications

Camera	NP-C-T5P30-M-Z					
Sensor	1/2.7", 5.0 megapixel, progressive scan, CMOS					
Lens	2.7 ~ 13.5mm, AF automatic focusing and motorized zoom lens					
DORI Distance	Lens (mm)	Detect (m)	Observe (m)	Recognise (m)	Identify (m)	
	2.7	60.8	24.3	12.2	6.1	
	13.5	303.8	121.5	60.8	30.4	
Angle of view (H)	93.38° ~ 28.56° 88° ~ 16.4° 121.4° ~ 33.7°					
Angle of View (V)						
Angle of View (O)						
Adjustment angle	Pan: 0° ~ 360°		Tilt: 0° ~ 90°		Rotate: 0° ~ 360°	
Shutter	Auto/Manual, shutter time: 1 ~ 1/100000s					
Minimum Illumination	Colour: 0.002Lux (F1.2, AGC ON)					
	0Lux with IR					
Day/Night	IR-cut filter with auto switch (ICR)					
Digital noise reduction	2D/3D DNR					
S/N	>52dB					
IR Range	Up to 30m (98ft) IR range					
Defog	Digital Defog					
WDR	120dB					
Video						
Video Compression	Ultra 265, H.264, MJPEG					
H.264 code profile	Baseline profile, Main Profile, High Profile					
Frame Rate	Main Stream: 5MP (2592*1944), Max 20fps; 5MP (2592*1944), Max 25fps (WDR OFF); 4MP (2560*1440), Max 30fps; 3MP (2048*1536), Max 30fps; 2MP (1920*1080), Max 30fps;					
	Sub Stream: 2MP (1920*1080), Max 30fps;					
	Third Stream: D1 (720*576), Max 30fps					
9:16 Corridor Format	Supported					
HLC	Supported					
BLC	Supported					

Technical Specifications

Video	
OSD	Up to 8 OSDs
Privacy Mask	Up to 4 areas
ROI	Up to 8 areas
Motion Detection	Up to 4 areas
Audio	
Audio Compression	G.711
Suppression	Supported
Sampling Rate	8KHZ
Storage	
Edge Storage	Micro SD, up to 256GB
Network Storage	ANR
Network	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible Integration	ONVIF (Profile S, Profile G, Profile T), API
Interface	
Network	1 RJ45 10M/100M Base-TX Ethernet
Built-in Mic	Supported
General	
Power	DC 12V±25%, PoE (IEEE 802.3af)
	Power consumption: Max 5W
Dimensions (Ø x H)	Φ129 x 110mm (Ø5.08" x 4.3")
Weight	0.82kg (1.8lb)
Working Environment	-40°C ~ 60°C (-40°F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Ingress Protection	IP67
Reset Button	Supported

Dimensions

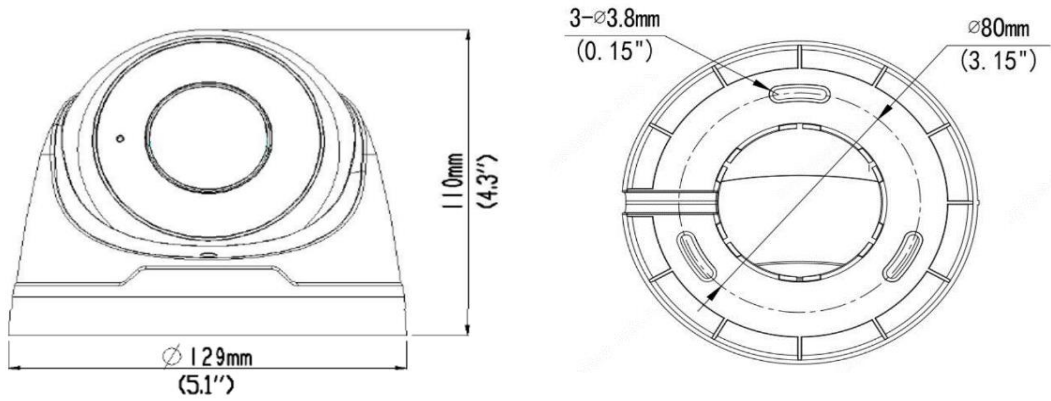

[illegible]