

8 Channel, 5MP, PoE Network Video Recorder NP-R-NVRP108-8P



- 8 PoE, 100Mbps Channels
- 2592x1944@30fps Playback
- 8-ch Synchronous Playback
- 1 SATA, Up to 10TB
- Simultaneous HDMI & VGA Output
- Supports Cloud Firmware Upgrades
- 1-ch HDMI, 1-ch VGA Outputs
- 1 10M/100M RJ45 Ethernet Interface
- 2 USB2.0 Ports
- ONVIF Support
- Ultra 265/H.265/H.264 Support
- Black Colour



Left View




Side View

Technical Specifications

Recorder	NP-R-NVRP108-8P
IP Video Input	8-Channels
Network	
Incoming Bandwidth	50Mbps
Outgoing Bandwidth	40Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	8 Channels
Corridor Mode Screen	3/4/5/7/9
Decoding	
Decoding Format	Ultra 265/H.265/H.264
Liveview/Playback	6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 6MP@20 1 x 5MP@30 2 x 4MP@25 2 x 3MP@30 4 x 1080p@25 8 x 960p@25 8 x 720p@30
Hard Disk	
SATA	1 SATA Interface
Capacity	Up to 10TB per Disk
External Interface	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Supported Standard	IEEE 802.3at, IEEE 802.3af
Interface	8 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 108W in total (13.5W for each)
General	
Power Supply	52V DC
Power Consumption	≤9 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F) Humidity ≤ 90% RH (non-condensing)
Dimensions (WxDxH)	260mm × 240mm × 46mm (10.2"×9.4"×1.8")
Weight (W/out HDD)	1.1kg (2.43 lb)

Dimensions

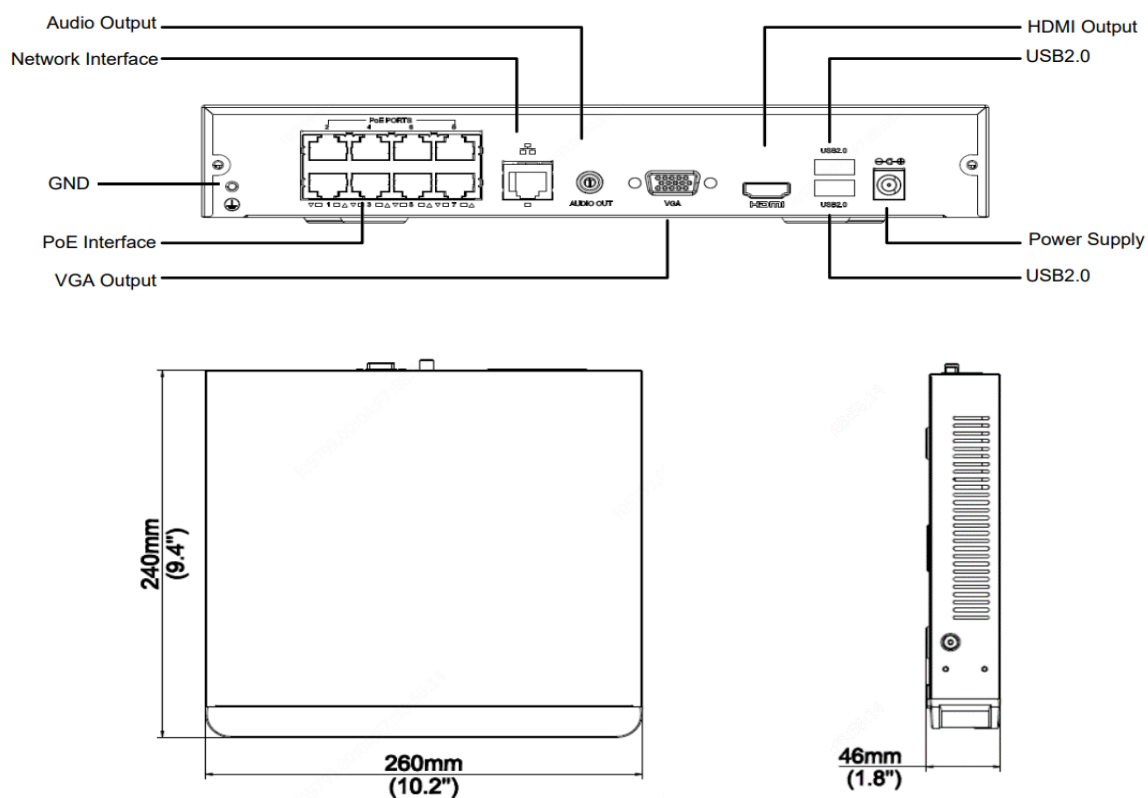

[illegible]