

8 Channel, 8MP, PoE Network Video Recorder NP-R-NVRP208-8P-4K



- 8 PoE, 100Mbps Channels
 - 3840x2160@30fps Playback
 - 8-ch Synchronous Playback
 - 2 SATA, Up to 20TB
 - Simultaneous HDMI & VGA Output
 - Supports Cloud Firmware Upgrades
 - 1-ch HDMI, 1-ch VGA Outputs
 - 1 Gigabit RJ45 Ethernet Interface
 - 2 USB2.0 Ports
 - ONVIF Support
 - Ultra 265/H.265/H.264 Support
 - Black Colour
-



Front View





Left View

Technical Specifications

Recorder	NP-R-NVRP208-8P-4K
IP Video Input	8-Channels
Two-way Audio Input	1-Ch, RCA
Network	
Incoming Bandwidth	160Mbps
Outgoing Bandwidth	96Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
HDMI Output	4k(3840x2160@30Hz), 4k(3840x2160@60Hz), 1024X768@60Hz, 1280X720@60Hz, 1280X1024@60Hz ,1920X1080@50Hz, 1920X1080@60Hz
VGA Output	1024X768@60Hz, 1280X720@60Hz, 1280X1024@60Hz,1920X1080@50Hz ,1920X1080@60Hz
Audio Output	1-Ch, RCA
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Synchronous Playback	8 Channels
Corridor Mode Screen	3/4/5/7/9
Decoding	
Decoding Format	Ultra 265/H.265/H.264
Liveview/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1x 8MP@30fps 2x 4MP@30fps 3x 3MP@25fps 4x 2MP@30fps 8x 1MP@30fps
Hard Disk	
SATA	2 SATA Interface
Capacity	Up to 10TB per Disk
External Interface	
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0
Supported Standard	IEEE 802.3af/at
Interface	8 independent 100Mbps PoE network interfaces
Max Power	Max 30W for single port Max 130W in total (16.25W for each)
Alarm In	4-Ch
Alarm Out	1-Ch

General	
Power Supply	220V AC
Power Consumption	≤9 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F) Humidity ≤ 90% RH(non-condensing)
Dimensions (WxDxH)	380mm ×315mm × 49.1mm(15.0" × 12.4" ×1.9")
Weight (W/out HDD)	2.4kg (5.29 lb)

Dimensions

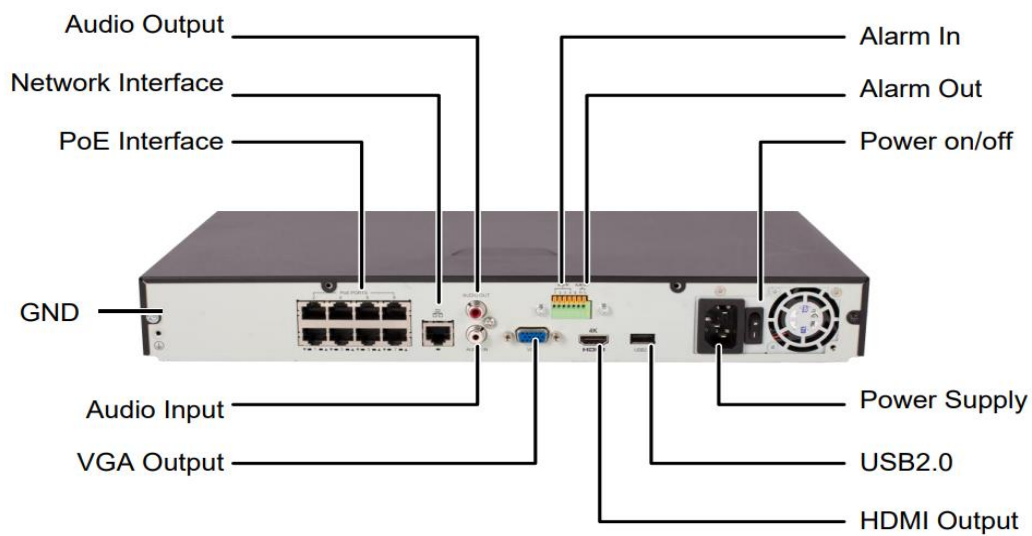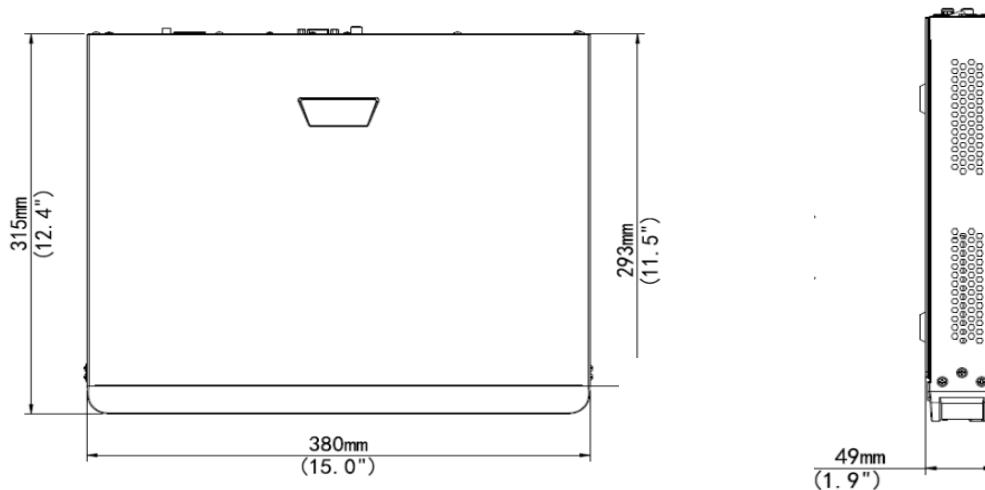

[illegible]